


If you are a Windows user, start on this page. If you are a Mac user, click [here](#).

XQD driver installation – Windows


If you have a mixture of XQD cards, including Sony XQD G Series 120GB+, proceed with Step1 below

If you ONLY have Sony XQD G Series 120GB+ cards, proceed to [Step9](#)


1. Connect CFexpress/XQD reader to computer.
2. Insert Lexar XQD card, Sony XQD card M Series, or Sony XQD card G Series (with the lowest capacity you have and as long as it is not a Sony XQD G 120GB+ card or above).
3. Go to **Device Manager** → **Other devices** and look for **XQD Memory Card** with yellow exclamation mark.

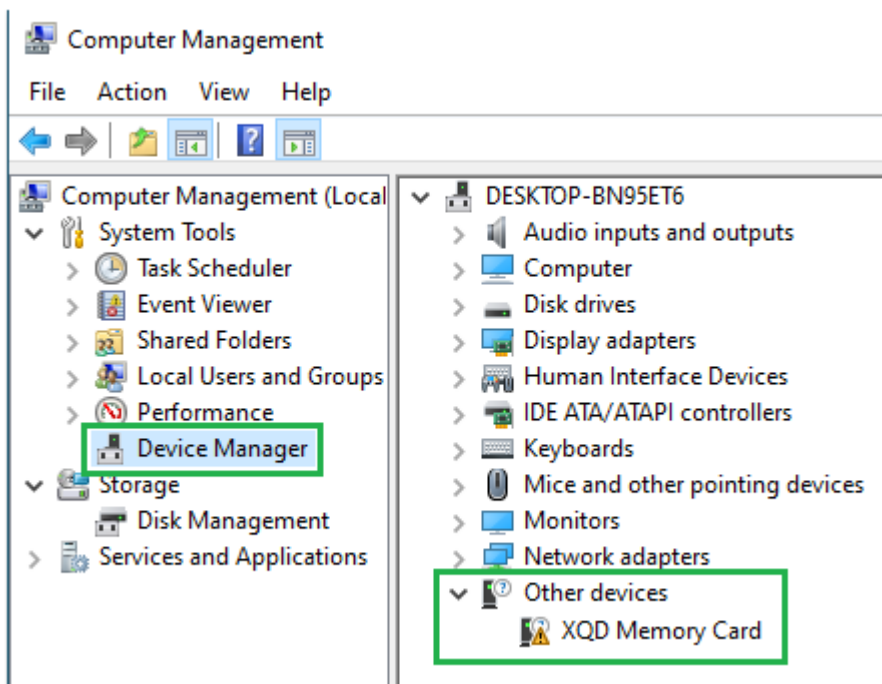

4. Right-click on **XQD Memory Card** and select **Update driver**.

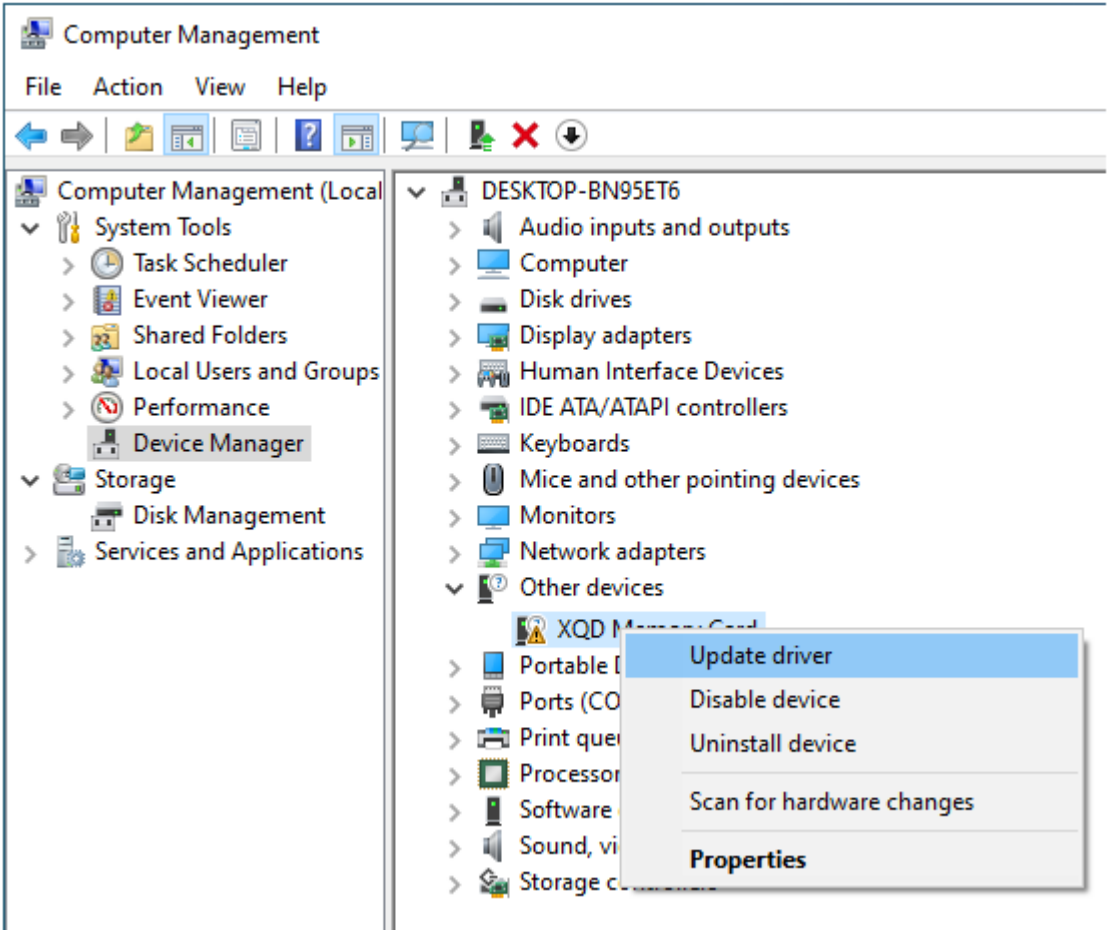

5. Select **Search automatically for updated driver software**.

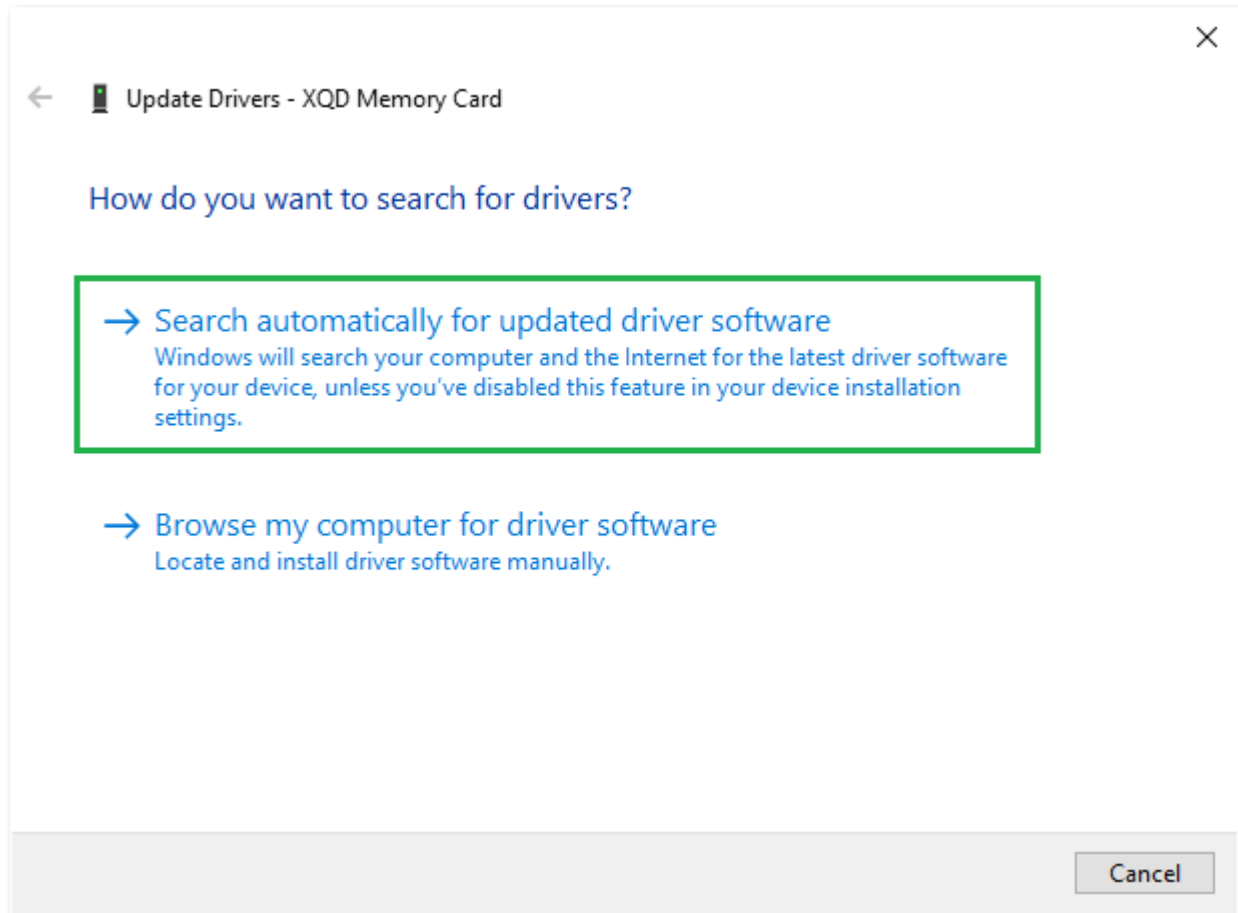

6. After the driver update is complete, eject XQD card, wait a few seconds (~5-7 seconds), and re-insert XQD card back into reader.

7. Windows system should now recognize the XQD card.

8. Remove XQD card from reader.

If you also have Sony XQD G-Series 120GB+*, proceed with the additional steps below

9. Insert Sony XQD G-Series 120GB+ card into reader.

10. Following instructions below to install the Sony XQD driver (v201).

11. Once driver installation is complete, eject Sony XQD card, wait a few seconds (~5-7 seconds), and re-insert Sony XQD card back into reader.

Download and Install XQD driver v201 for Windows 10 if you have Sony XQD G-Series 120GB+ card

Download Windows V201 XQD Driver through steps 1A or 1B below:

1- Click [here](#) to down Windows XQD Driver from Sony's website

OR

2a- Open a web browser, go to

https://www.sony.co.jp/Products/memorycard/xqd/application/drv_installer.html

2b- Navigate to the bottom of webpage and click on “...(Windows)” icon.
Proceed to download and save the XQD Driver Installer on your Desktop or a folder of your choice. The default folder is your **Downloads** folder.

ス（第三者が提供する場合に限らず、ソニーが提供する場合も含まれます。以下、「協働サービス等」と総称します）に依存することがあります。また、お客様は、許諾ソフトウェアを通じ、協働サービス等を許諾ソフトウェアの機能の一部として利用することがあります。いずれの場合にも、協働サービス等は、その提供者の判断により予告なく中止または中断することがあります。ソニーは、協働サービス等および当該機能が将来にわたって利用可能であること、中断または変更なく正常に稼働することを含め、一切の保証をいたしません。

第6条（第三者に対する責任）

使用者が許諾ソフトウェアを使用することにより、第三者との間で著作権、特許権その他の知的財産権の侵害を理由として紛争を生じたときは、使用者自身が自らの費用で解決するものとし、ソニーおよび原権利者に一切の迷惑をかけないものとします。

第7条（契約の解除）

ソニーは、使用者が本契約に定める条項に違反した場合、直ちに本契約を解約し、またはそれによって蒙った損害の賠償を使用者に対し請求できるものとします。

第8条（許諾ソフトウェアの廃棄）

前条の規定により本契約が終了した場合、使用者は契約の終了した日から2週間以内に許諾ソフトウェア、関連書類およびその複製物を廃棄するものとし、その旨を証明する文書をソニーに差し入れるものとします。

第9条（自動アップデート）

ソニーがセキュリティ機能の向上、エラーの修正、アップデート機能の向上の目的で許諾ソフトウェアを適宜自動的にアップデートすることに使用者は同意し、アップデートされた許諾ソフトウェアについても本使用許諾契約書の各条件が適用されるものとします。

第10条（その他）

1. 本契約の一部が法律によって無効となった場合でも、当該条項以外は有効に存続するものとします。
2. 本契約に定めなき事項もしくは本契約の解釈に疑義を生じた場合には、ソニー、使用者は誠意をもって協議し、解決するものとします。

以上

▶ 同意する(Windows)

▶ 同意する(Mac)

免責事項 | 商標

up Sit

What do you want to do with XQD_Drv_Installer_win_v201.zip (5.1 MB)?
From: sony.net

Open


Save

^


Cancel

×


3. Navigate to the **Downloads** folder, right-click the zip file and select “Extract All”

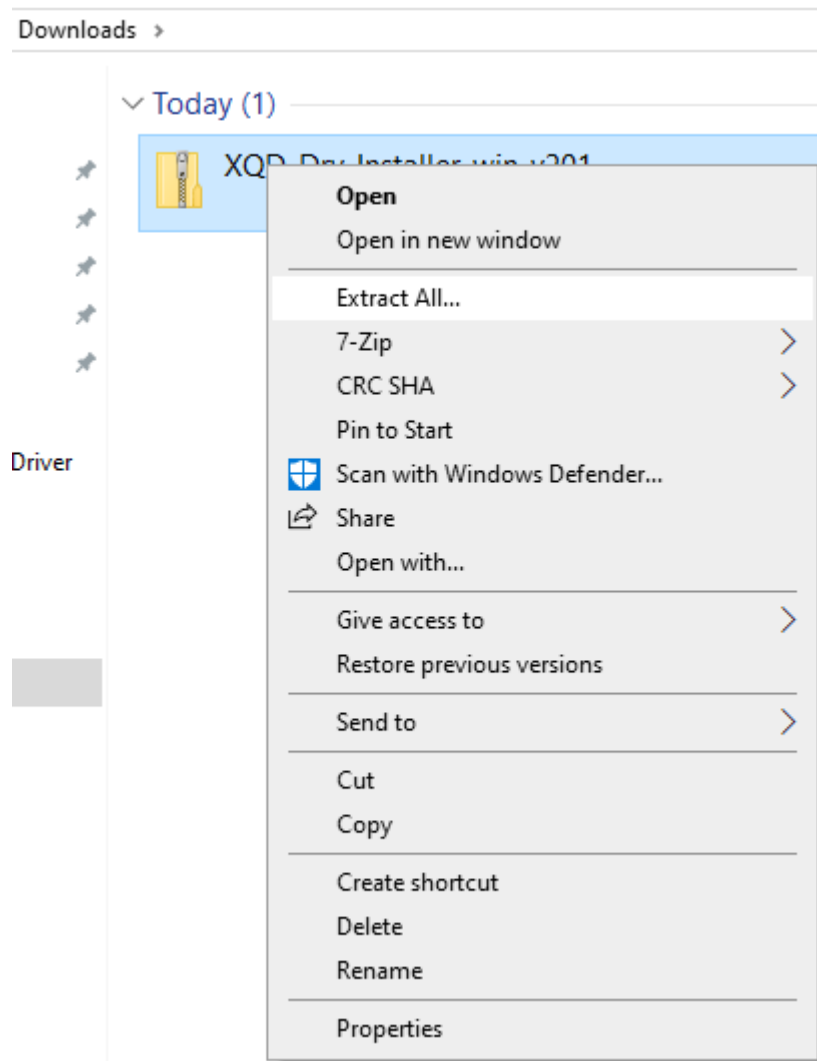


4. Select a file location where you want to extract the files and then click on **“Extract”**. The default location is your system’s **Downloads** folder.

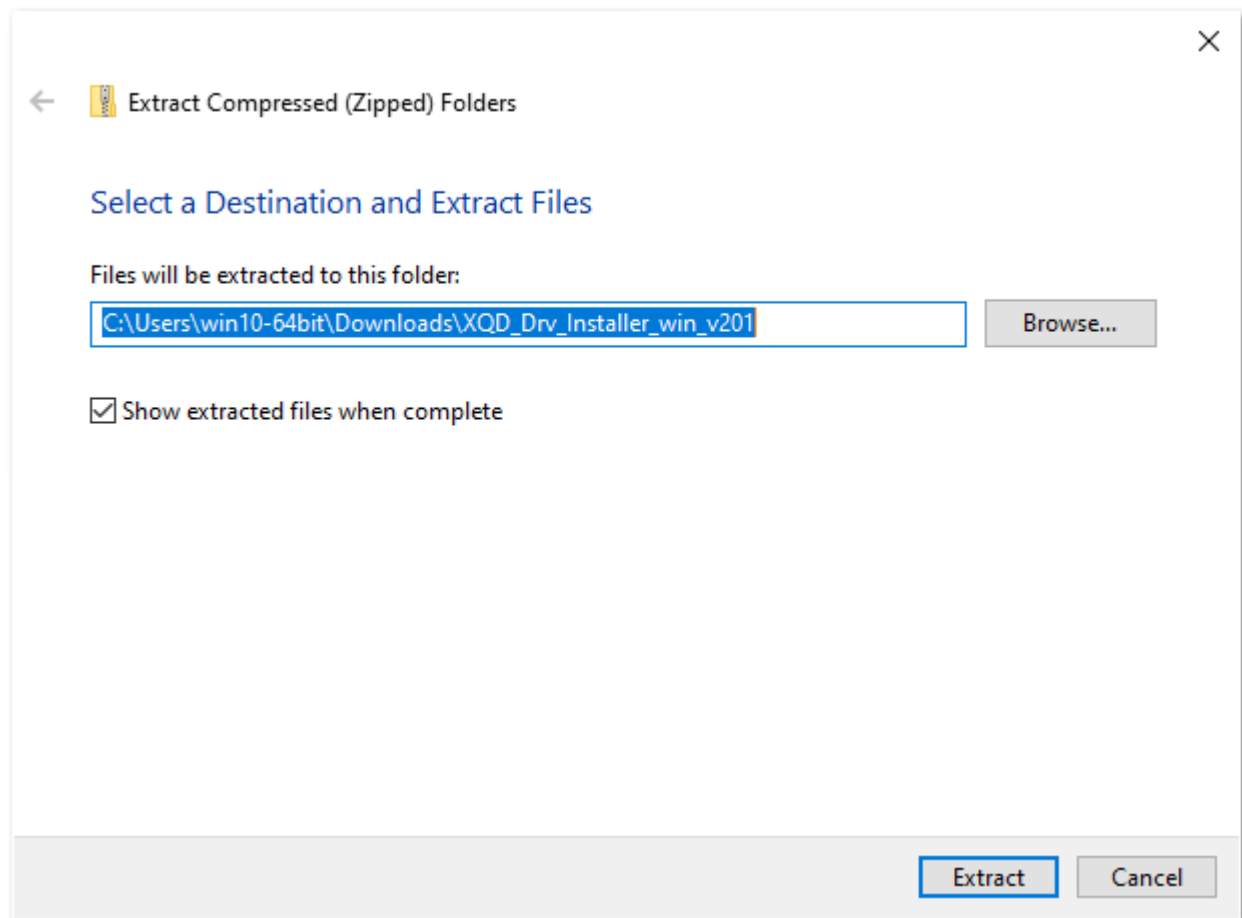


5. Double-click the **XQD_Drv_Installer_win_v201** subfolder in the **Downloads** folder.

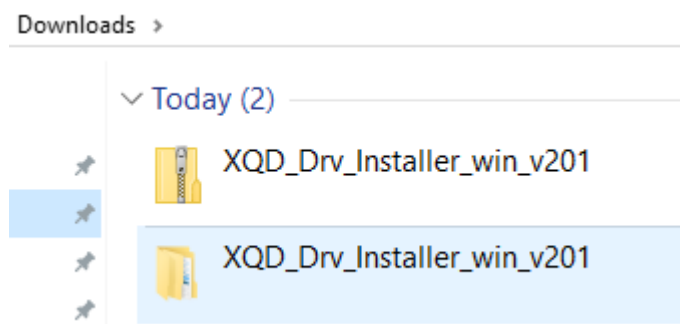


6. Right-click the zip file and extract again.

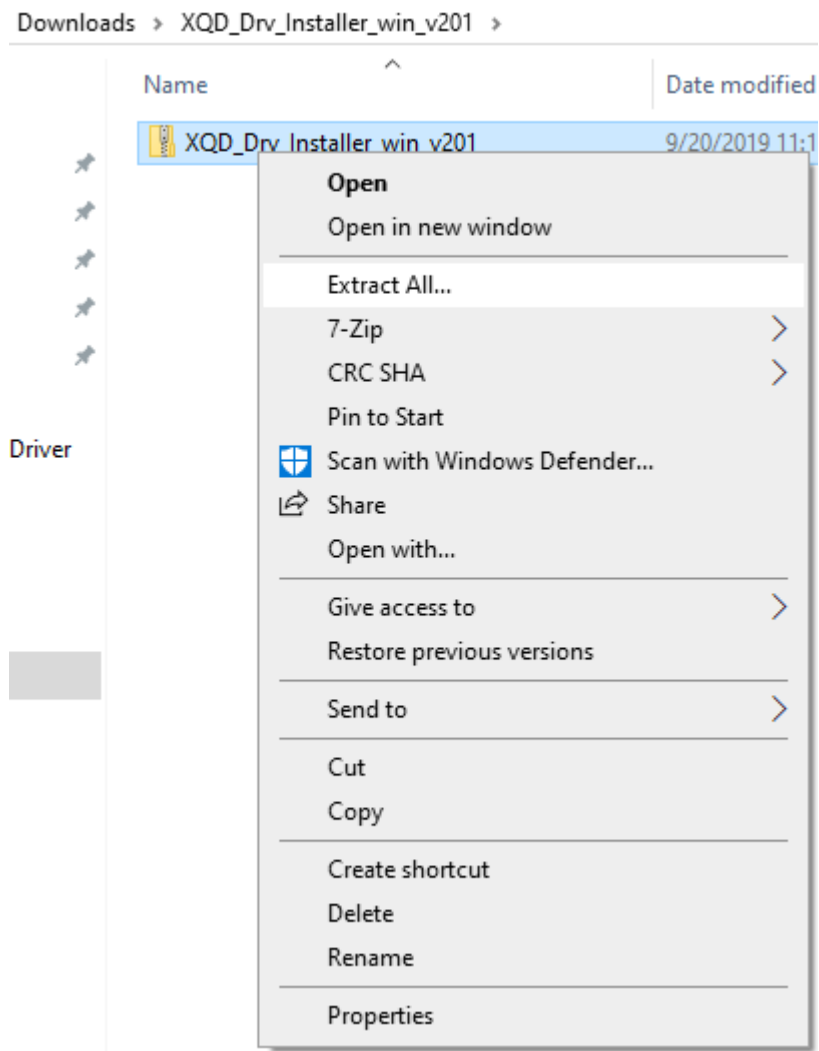

7. Double-click on the **XQD_Drv_Installer_win_v201** to start XQD driver installation.

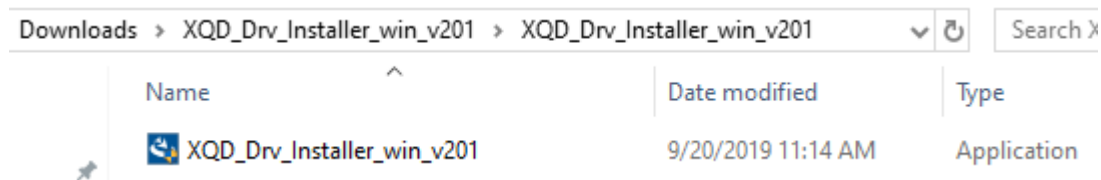

8. Follow the instructions on screen to install the XQD driver. **Restart** your computer after XQD driver installation is finished.

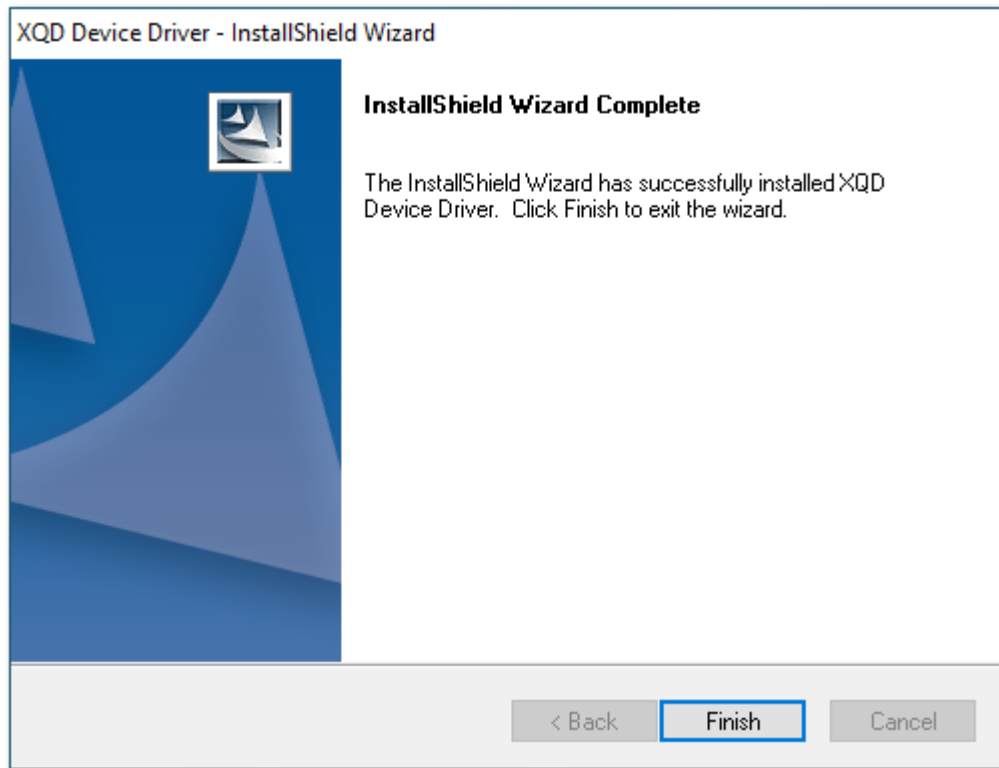

Installation of XQD driver for Mac OS computers

1. Download Mac OS XQD driver by the following steps 1A or 1B below:

A- Click [here](#) to download XQD Driver for Mac OS from Sony's website:

OR

B- Click on link below, go the bottom of the page and click on the box with Mac written on it:
https://www.sony.co.jp/Products/memorycard/xqd/application/drv_installer.html

第8条（許諾ソフトウェアの廃棄）

前条の規定により本契約が終了した場合、使用者は契約の終了した日から2週間以内に許諾ソフトウェア、関連書類およびその複製物を廃棄するものとし、その旨を証明する文書をソニーに差し入れするものとします。

第9条（自動アップデート）

ソニーがセキュリティ機能の向上、エラーの修正、アップデート機能の向上の目的で許諾ソフトウェアを適宜自動的にアップデートすることに使用者は同意し、アップデートされた許諾ソフトウェアについても本使用許諾契約書の各条件が適用されるものとします。

第10条（その他）


- 1.本契約の一部が法律によって無効となった場合でも、当該条項以外は有効に存続するものとします。
- 2.本契約に定めなき事項もしくは本契約の解釈に疑義を生じた場合には、ソニー、使用者は誠意をもって協議し、解決するものとします。

以上

▶ 同意する(Windows)

▶ 同意する(Mac)

2. Double-click “**XQD_Drv_Installer_mac_v200.dmg**”, which is usually located in the “**Downloads**” folder.

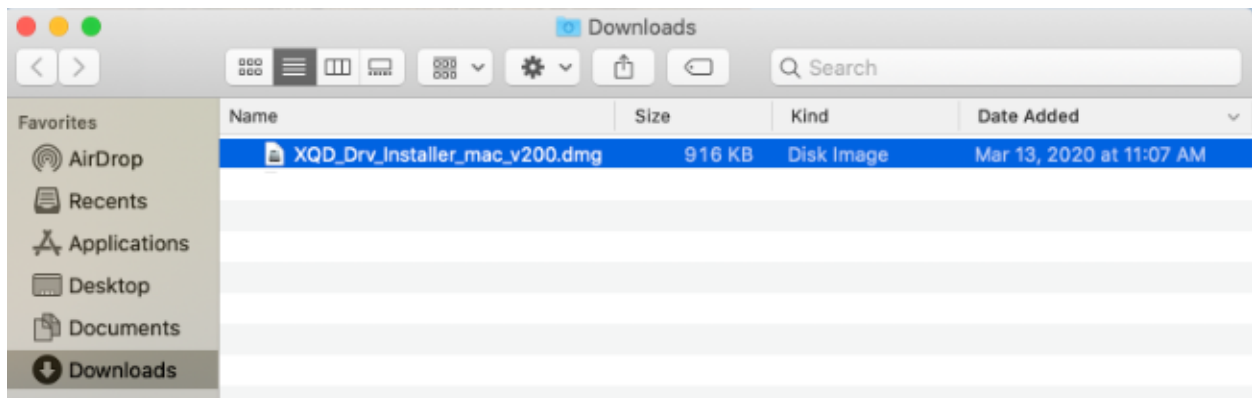


3. Double-click “**XQD Device Driver Installer v2.0.0.06260**” from the pop-up window to start XQD driver installation for your Mac.




4. Follow instructions onscreen to install XQD driver.



Please read step 5 – 13 below before proceeding

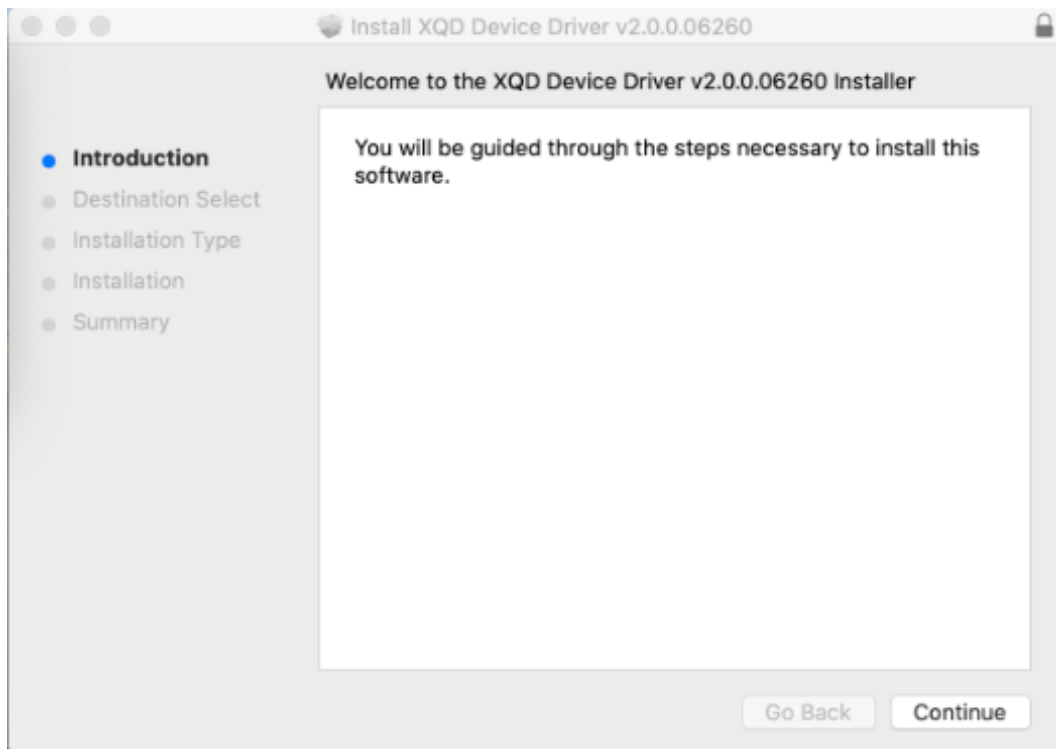


5. During the XQD driver installation, you might encounter a pop-up window stating “**System Extension Blocked**”. Instead of clicking on “OK”, “**Open Security Preferences**” and “**Allow**” system software from “**Sony Corporation**” to load. If you do not see the pop-up window, still go to “**Security&Privacy**” and check/allow system software from “**Sony Corporation**” to load.

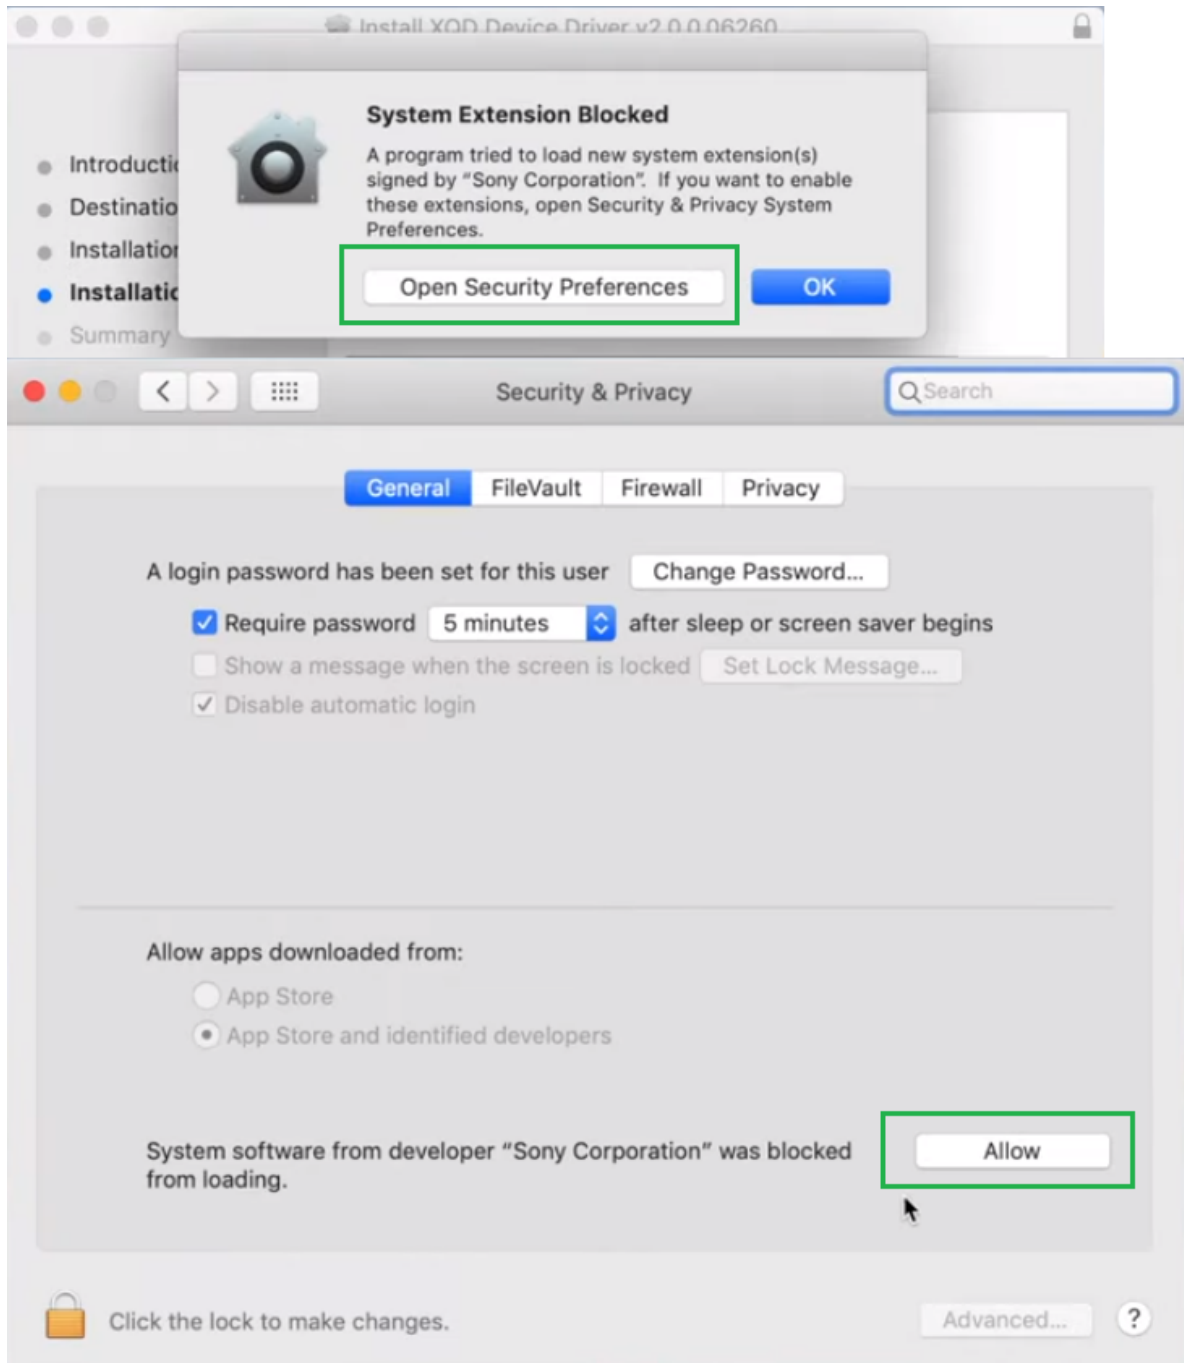

6. Mac should now recognize the XQD card.


7. If you do not see any “**System software from developer “Sony Corporation” was blocked from loading.**” message in “**Security & Privacy**” setting, proceed to the next step.

8. From the **Apple menu**, select **File** → **Find**

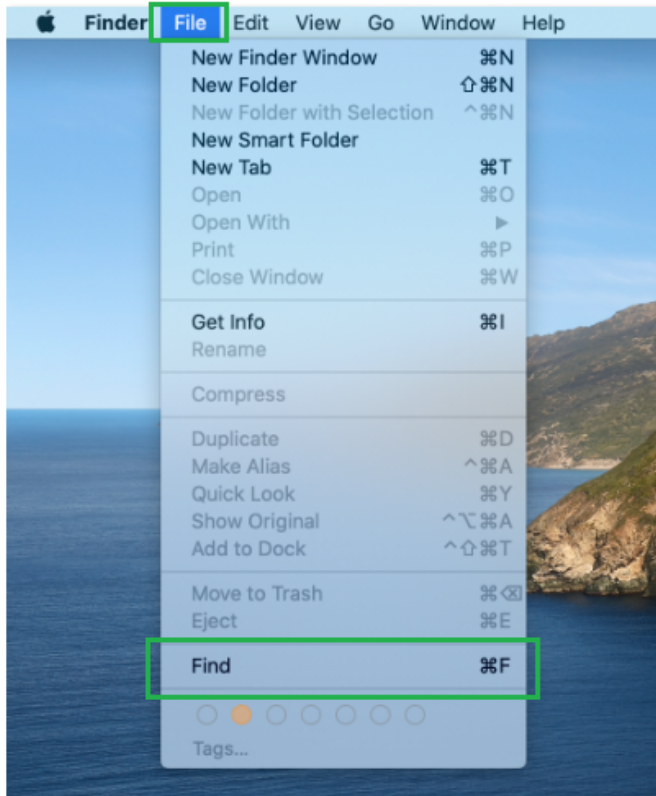


9. Type **XQD** in the Search box.

10. You should see TWO **XQD Memory Card.kext** listed as Search result.

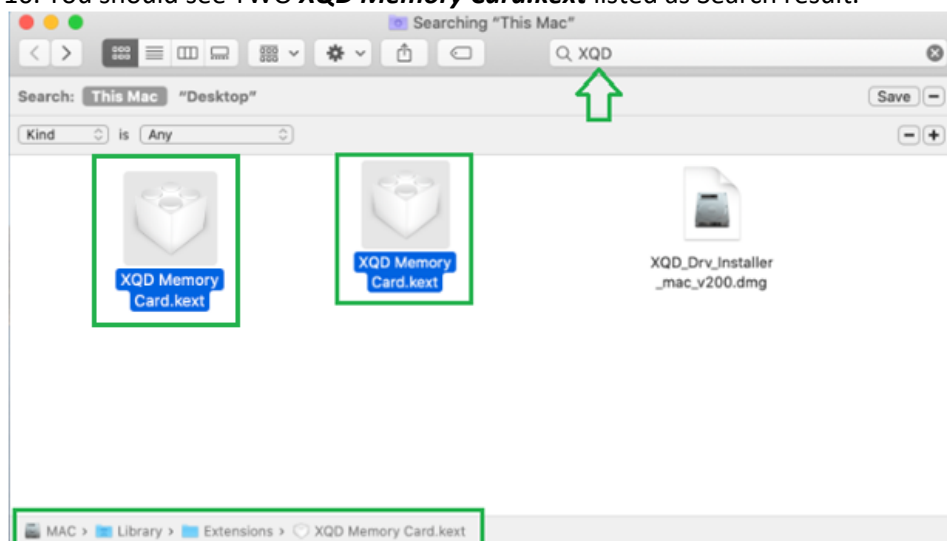

11. If you only see ONE **XQD Memory Card.kext** listed as Search result and it is from directory **/Library/StagedExtensions/Library/Extensions/** , proceed to copy that **XQD Memory Card.kext** to directory **/Library/Extensions/**

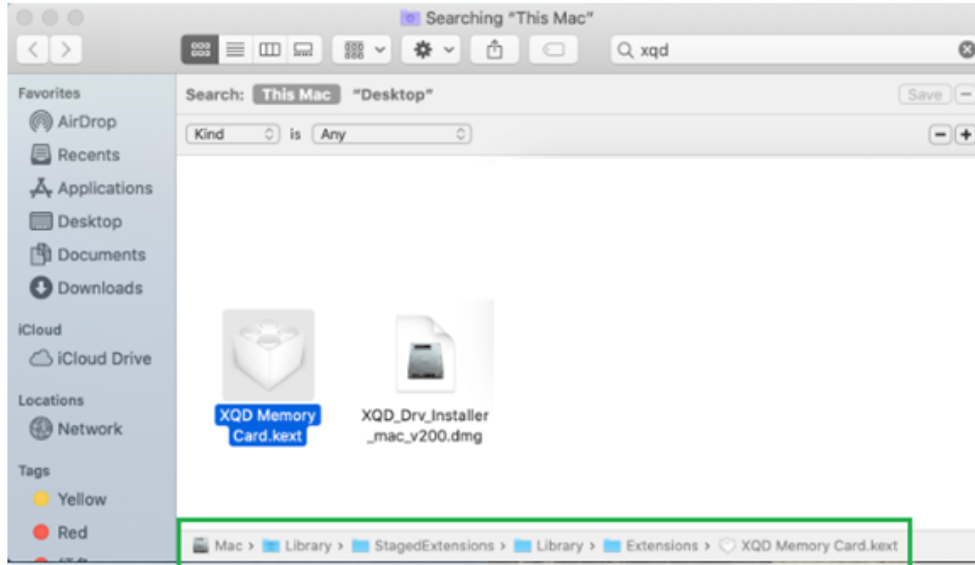

12. Restart Mac with a XQD card inserted into CFexpress/XQD reader.

13. Go to “**Security & Privacy**” setting, you should see “**System software from developer “Sony Corporation” was blocked from loading.**” message pending. Proceed to allow the software to run.

